



Oedometers tests in Compacted Tropical Soils in the State of Rio de Janeiro, Brazil

Viktor L. F. S. Ramos ^{a*} and C. F. Mahler ^a

^a *Federal University of Rio de Janeiro, Brazil.*

Authors' contributions

This work was carried out in collaboration between both authors. Authors VLFSR and CFM did conceptualization, did data curation, helped in data visualization, wrote the original draft, reviewed and edited the manuscript. Author VLFSR performed methodology, did formal analysis, investigated the work, helped in project administration, resources and software development of the paper. Both authors read and approved the final manuscript.

Article Information

DOI: 10.9734/ASRJ/2023/v7i2126

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/98601>

Original Research Article

Received: 01/03/2023
Accepted: 03/05/2023
Published: 11/05/2023

ABSTRACT

Oedometers and secondary oedometric tests with controlled shear rates were performed in two soils from the Baixada Fluminense region, in the city of São João do Meriti – Rio de Janeiro, Brazil. The soils in question are deposited on non-compacted soft soil with the addition of Municipal Solid Waste (MSW). Both samples of compacted soil were excavated at a depth of 10.0 m, and undisturbed samples were collected.

Keywords: Oedometers; edometric; sand; clay; tension.

*Corresponding author: E-mail: viktorlabuto@coc.ufrj.br, viktorlabuto@poli.ufrj.br;

1. INTRODUCTION

This edometric compression test, commonly called "conventional consolidation test", is the oldest and best known type for determining soil compressibility parameters [1-5]. The test consists of the axial compression of a specimen, confined laterally, by applying vertical pressures, with a duration of 24 hours and a predefined load ratio [6-11].

2. MATERIALS AND METHODS

2.1 Sample Collection

The experimental ground of study was established in 2010 to study the construction of landfills on layers of non-compacted soft soils with the addition of Municipal Solid Waste (MSW), a common environmental problem throughout the country (Mahler, 2018). Moreover, the region where the samples were collected is in São João do Meriti, located in the Metropolitan Region of Rio de Janeiro (22°47'40.5"S 43°21'05.9"W).

Two undisturbed samples were collected in the field. Point 1 in the slope Region and Point 2 in the Central Region of the development. The samples were 25x25x25 centimeters in size. They were rapidly paraffined and protected, in order to not lose humidity. Therefore, they would not undergo changes during transport to the laboratory, where they were placed in a moisture chamber. For safety factors, Point 1 was chosen for appearing to be more clayey and Point 2 for having higher settlements, as previous mention by Deere e Patton (1971).

2.2 Oedometric

The edometric compression test procedure follows the following steps:

Molding of the specimen with the help of a beveled ring to reduce disturbances in the sample during carving; Placement of the ring, with the soil, in the rigid cell that should contain a porous stone at its base with filter paper, to allow the water to drain from the specimen; Assembly of the top plate, or "top cap", which should also contain a porous stone; Displacement meter adjustment for vertical displacement measurements; Application of vertical loads in a loading ratio. For this test, the first loading stage was 0.031 (kg/cm²), with 8 loading stages that were applied to the sample, that is, the loading

variation was 0.031; 0.062; 0.125; 0.250; 0.500; 1,000; 2,000 and 4,000 (kg/cm²), and three discharging stages 2,000; 1,000; 0.500 (kg/cm²). Each charging stage must last for 24 hours. During each loading stage, vertical compression measurements of the sample are made as a function of time, for times 0, 0.1, 0.25, 0.50, 1, 2, 4, 8, 15, 30, 60, 120 and 240 minutes. With these data, consolidation curves are constructed, that is, displacement versus time. For the case of cohesive soils, the Casagrande Method is used. In the process of consolidation, the dissipation of pore pressures in the sample occurs. Considering that the degree of consolidation of the sample for a given time factor T_v is identical to the average percentage of pore-pressure dissipation, at the end of the consolidation process ($U = 100\%$) the increase in the effective vertical stress along the entire the thickness of the sample will be equal to the total stress increment applied to the top of the sample. With the deformation values, at the end of each loading stage, a curve of the effective stress versus the deformation produced by the increase of this stress is constructed [12,13]. This curve can be displayed in various ways, such as vertical effective stress versus void ratio, vertical effective stress versus specific volumetric strain.

The DS test was performed in accordance with standard ASTM 2974 soil procedures, to determine the shear stress [14]. Six tests were carried out at two different points in saturated state, with initial tensions of 75 kPa, 150 kPa and 300 kPa for both points. The sample cell has 36 cm² in area (6 cm x 6 cm), is horizontally split and secured by two screws. The adopted shear velocity was 0.043 mm.min⁻¹. The DS tests were carried out with flooding for at least one night.

2.3 Secondary Oedometric

With the aim of comparing the creep behavior of the soil, creep-type edometric tests (P1 and P2) were carried out on the soil for effective stress levels equal to those previously defined.

The creep study at the points was carried out for an effective stress equal to that found at a depth of 10m (corresponding roughly to the middle of the urban solid waste deposit) plus the stress associated with the construction of a landfill, of large dimensions in plan, with 10m high (landfill = 20kN/m³). Thus, in the tests, we have a value of 210kPa (= 50 + 160kPa) as the effective creep stress, Creep-type edometric tests were carried out with load steps lasting 24 hours, except for the step corresponding to the effective creep

tension, which lasted for 14 days, as described above. After the sample saturation phase (± 24 h), the load step corresponding to the effective "resting" tension was applied, immediately followed by the creep step (active for 14 days). This was followed by a load cycle until the oedometer's load capacity was exhausted, ending the test with a discharge cycle.

The interpretation of the results of the creep-type oedometric tests must be done with care, as they are based on intact samples collected at a depth of 4m, different from the depth under study in the referred tests. In this way, they are unfeasible. Quantitative interpretations, although it is possible to elaborate qualitative extrapolations regarding field behavior.

3. RESULTS AND DISCUSSION

3.1 Oedometric

Table 1. Informative table with average density coefficient values for the 2 points:

	Oedometric Test	cv ou ch x 10-3
P1	vertical	37,09
P2	vertical	40,66

The graphs below show the void ratio vs effective vertical stress curve for the different tests performed (Figs. 1 and 2):

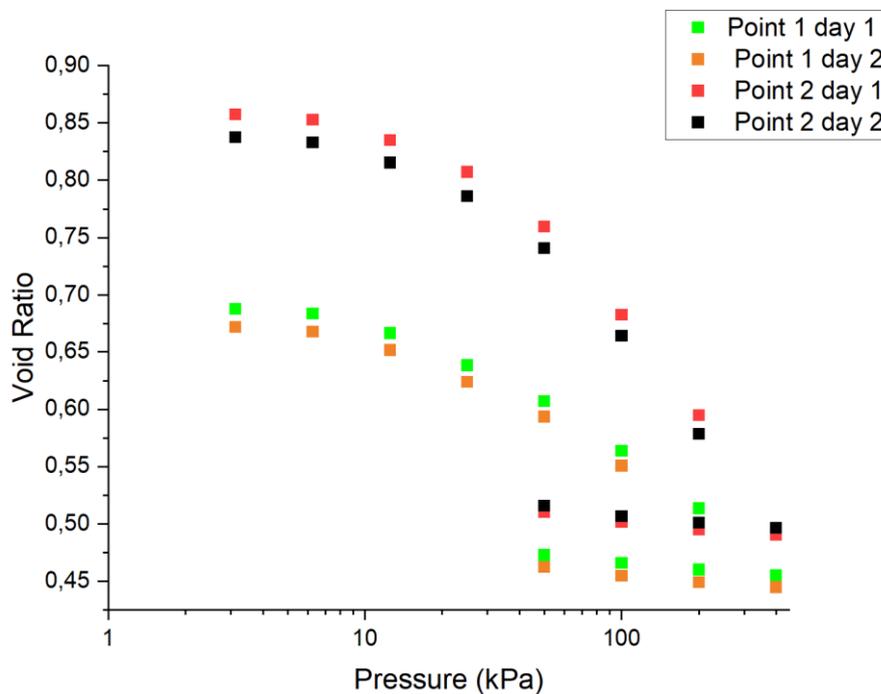


Fig. 1. Point 1 and 2 - Void ratio in the different tests

Table 2. Informative table with average deformation in the creep tension for the 2 points

Test	C_{α} Creep Tension (kPa)
P1	210,0
P2	0,023
P2	0,028

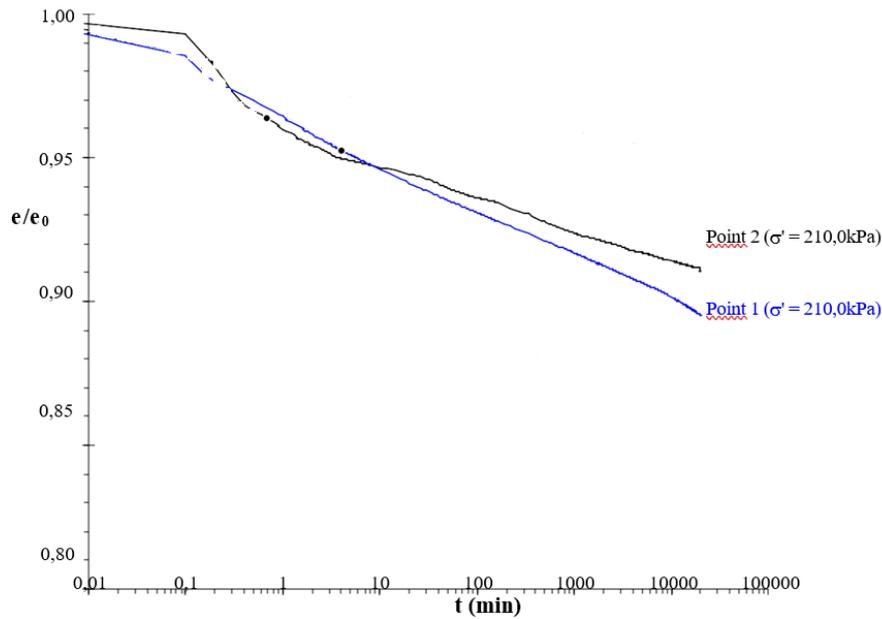


Fig. 2. Point 1 and 2 - Void Index in the different minutes (secondary oedometric)

Nascimento [15] found very close results for the silty clay of the Canal do Porto da Baixada Santista in the region of Ilha Barnabé, with an average c_v of $79.57 \times 10^{-3} \text{ cm}^2/\text{s}$ and a standard deviation of $27.67 \times 10^{-3} \text{ cm}^2/\text{s}$.

4. CONCLUSION

In sample/point 1, a final void ratio was observed in the saturated case lower than in the natural case, as expected. The difference between the initial and final voids index in the saturated soil was also greater. The tests carried out can be considered similar to the twins, in which the sample is tested in the natural and saturated state, in order to have a view of the saturation effect, which was proven.

In the case of sample/point 2, the values of the final void index, of the sample tested in the natural and saturated state, are similar. However, the initial values of the voids ratio of the saturated sample are higher, so that the variation of the voids index in the saturated soil is greater and the greater deformation of the saturated sample was also confirmed.

There was a small difference in the initial moistures of the samples, but not significant.

The compaction coefficient results are typical for soils of this type, with a mean of $39.43 \times 10^{-3} \text{ cm}^2/\text{s}$ and a standard deviation of $15.80 \times 10^{-3} \text{ cm}^2/\text{s}$.

Finally, it is worth noting that all the soils present a certain heterogeneity, which justifies certain differences in the characteristics of the soils collected, although from the same area and subject, in principle, to the same conditions of compaction.

ACKNOWLEDGEMENTS

The first author thanks APES (Coordination for the improvement of Higher Education Personnel) for the financial assistance. The second and fourth author thanks CAPES, FAPERJ, CNPq and DAAD for their constant support.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Andersen KH. Cyclic soil parameters for offshore foundation design. Third ISSMGE McClelland Lecture. Frontiers in Offshore Geotechnics III – Oslo, 2015;1.
2. BS 1377-8. Methods of test for soils for civil engineering purposes – part 8: shear strength tests (effective stress). British Standards Institution, London; 1990.
3. Coelho PALF. Caracterização geotécnica de solos moles. Estudo do local experimental da Quinta do Foja (Baixo Mondego). Dissertação de Mestrado,

- Dep. Eng.^a Civil da FCTUC, Coimbra; 2000.
4. Coutinho RQ, Bello MIMCV. Analysis and Control of the Stability of Embankments on Soft Soils: Juturnaíba and Others Experiences in Brazil. *Soils & Rocks*, v. 2011;4:331-351.
 5. Dyvik R, Berre T, Lacasse S, e Raadim B. Comparison of truly undrained and constant volume direct simple shear tests. *Géotechnique*, v. 1987;37(1): 3-10.
 6. Merighi JV, Alvarez Neto L, Fortes RM. Control of soil compaction through the mini- MCV / HILF test. In: XXII Anual Paving Meeting; 1987.
 7. Ramos VLFS. Determination of resistance parameters of contaminated compacted tropical soils in the state of Rio de Janeiro. In: *International Journal of Advanced Engineering Research and Science (IJAERS)*. 2018;5(7):76-83.
 8. Schoder KR. Determinação de Parâmetros Geotécnicos (c' e Φ) de Misturas de Solo Estabilizado por Meio de Cisalhamento Direto e Compressão Triaxial". Dissertação de M.Sc, COPPE/UFRJ, Rio de Janeiro; 2017.
 9. Simms PH, Yanful EK. Predicting soil-water characteristic curves of compacted plastic soils from measured pore-size distributions. *Géotechnique*. 2002;52(4): 269 - 278.
 10. Stein K, Budny J, Hartmann D, Tapahuasco FC. Determination of Geotechnical Parameters (c and F) of a lateritic soil with different lime and rice husk ash contents. In: XVI Nacional Conference of Geotechnical / 6asPortuguese-Spanish Geotechnical Day. Ponta Delgada, Portugal; 2018.
 11. Vaz LF. Classificação genética dos solos e dos horizontes de alteração de rocha em regiões tropicais. *Soil and Rocks*. 1996;19 (2):117-136.
 12. Leao LA, Fortes RM. Estudo da variabilidade da resistência ao cisalhamento de alguns solos classificados segundo a mct (miniatura, compactado, tropical) para dois níveis de energia: Normal e intermediária. VII Jornada de Iniciação Científica. Universidade Presbiteriana Mackenzie; 2011.
 13. Kavazanjian E, Jr. Seismic design of solid waste containment facilities. In *Proceedings of the 8th Canadian Conference on Earthquake Engineering*. Vancouver, BC, June 1999. Google Scholar. 1999;51-89.
 14. Zhao YR, Xie Q, Wang GL et al. A study of shear strength properties of municipal solid waste in Chongqing landfill, China. *Environmental Science and Pollution Research*. 2014;21(22): 12605–12615.
 15. Nascimento V. Características de Adensamento da Argila do Canal do Porto de Santos na Região da Ilha Barnabé, Dissertação de Mestrado, COPPE/UFRJ, Rio de Janeiro, Brasil; 2008.

© 2023 Ramos and Mahler; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/98601>